

Flow Sleeve for C-SJ Pumps


Device to protect the pump from dirt and for motor cooling

A flow sleeve is a sleeve that goes around the pump body and motor. It has two functions:

- 1. A flow sleeve reduces the amount of dirt in the pump. Where water sources contain sand or have the potential for dirt falling into them (uncapped wells) a flow sleeve is recommended to protect the pump from dirt. Due to the large inner diameter of the flow sleeve the water rises very slowly and dirt deposits at the bottom of the well. Subsequently, water with less sediments enters the pump which increases its lifetime.
- 2. A flow sleeve cools the motor. In open water, tanks or pools there is no natural flow of water across the motor which can lead to heat build-up. The tube enforces water flow across the motor which has a cooling effect.

FEATURES

- Due to the large inner diameter of the flow sleeve the water rises very slowly allowing dirt to settle at the bottom of the well
- The life expectancy of the pump is increased due to less sand entering the pump
- Simple installation
- The flow sleeve must be selected according to the pump system (see table)
- The required borehole diameter depends on the diameter of the flow sleeve

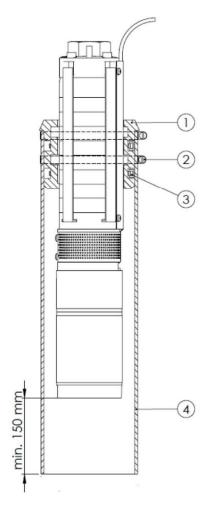





ORDER INFORMATION (please compare (1), (2) etc. with the sample flow sleeve)

Item no.	Product name	Scope of delivery	Suitable for
19-000230	Flow Sleeve Kit for	(1) 1 x adaptor	All 4" C-SJ pump ends
	4" C-SJ Pumps with	(2) 2 x hose clamp	with 4" motor
	4" Motor	(3) 2 x cable strip	
		(4) 1 x PVC tube: D140x4, 0.5 m length	
19-000250	Flow Sleeve Adaptor	(1) 1 x adaptor	All 4" C-SJ pump ends
	for 4" C-SJ Pumps	(2) 2 x hose clamp	with 4" motor
	with 4" Motor	(3) 2 x cable strip	
		A PVC tube D140x4mm (4) is not part of the scope	
		of delivery.	
19-000255	Flow Sleeve Adaptor	(1) 1 x adaptor	All C-SJ17-X/30-X with
	for C-SJ17-X/30-X	(2) 2 x screw 4.2x16	4" motor
	with 4" motor	(3) 1 x hose clamp	
		A DVG L ha D460 A may (4) is a standard fall a second	
		A PVC tube D160x4mm (4) is not part of the scope	
	El Cl IVI C	of delivery.	All C CIAC V
19-005170		(1) 1 x adaptor	All C-SJ42-X pumps
	C-SJ42-X Pumps	(2) 2 x hose clamp d =190-210 mm	
		(3) 2 x hose clamp d= 150-170 mm	
	=1 01 1	(4) 1 x PVC tube: D200x5, 1.4 m length	A III O O A A O A A
19-005180	Flow Sleeve Adaptor	(1) 1 x adaptor	All C-SJ42-X pumps
	for C-SJ42-X Pumps	(2) 2 x hose clamp d=190-210 mm	
		(3) 2 x hose clamp d=150-170 mm	
		A PVC tube D200x5mm (4) is not part of the scope	
		of delivery.	
19-001400	Flow Sleeve Kit for	(1) 1x adaptor	All C-SJ8-x and C-
19-001400	C-SJ8-x/12-x for 6"	(2) 2x hose clamp d=190-210 mm	SJ12-x pumps with 6"
	motor with tube	(3) 2x hose clamp d=150-210 mm	motor
	inotor with tube	(4) 1x PVC tube: D200x5, 1,4m length	IIIOtoi
	Flow Sleeve Adaptor	(1) 1x adaptor	All C-SJ8-x and C-
13-001430	for C-SJ8-x/12-x for	(2) 2x hose clamp d=190-210 mm	SJ12-x pumps with 6"
	6" motor	(3) 2x hose clamp d=150-210 mm	motor
		(3) 2x 1103e claimp u=130-170 111111	Inotol
		A PVC tube D200x5mm (4) is not part of the scope	
		of delivery.	
19-001410	Flow Sleeve Kit for	(1) 1x adaptor	All C-SJ17-x and C-
	C-SJ17-x/30-x for 6"	(2) 2x hose clamp d=190-210 mm	SJ30-x pumps with 6"
	motor with tube	(3) 2x hose clamp d=150-170 mm	motor
		(4) 1x PVC tube: D200x5, 1,4m length	
19-001460	Flow Sleeve Adaptor		All C-SJ17-x and C-
	for C-SJ17-x/30-x for	2x hose clamp d=190-210 mm	SJ30-x pumps with 6"
	6" motor	2x hose clamp d=150-170 mm	motor
		A PVC tube D200x5mm (4) is not part of the scope	
		of delivery.	



Siebenstuecken 24, 24558 Henstedt-Ulzburg, Germany Tel +49 (0)4193 8806-700, www.lorentz.de





DIMENSIONS/WEIGHT

Flow Sleeve Kit for 4" C-SJ Pumps with 4" Motor (19-000230):

Packaging dimensions: 590 x 150 x 130 mm

23.2 x 6.0 x 5.1 in sample flow sleeve

Total weight: 3.3 kg / 7.3 lbs

Flow Sleeve Adaptor for 4" C-SJ Pumps with 4" Motor (19-000250, without tube):

Packaging dimensions: 165 x 165 x 110 mm

6.5 x 6.5 x 4.3 in

Total weight: 1.2 kg / 2.6 lbs

Flow Sleeve Adaptor for C-SJ17-X/30-X with 4" motor (19-000255, without tube):

Packaging dimensions: 165 x 165 x 110 mm

6.5 x 6.5 x 4.3 in

Total weight: 1.2 kg / 2.6 lbs

Flow Sleeve Kit for C-SJ42-X Pumps (19-005170):

Packaging dimensions: 1500 x 205 x 215 mm

59.0 x 8.1 x 8.5 in

• Total weight: 9.3 kg / 20.6 lbs

Flow Sleeve Adaptor for C-SJ42-X Pumps (19-005180, without tube):

Packaging dimensions: 230 x 230 x 130 mm

9.1 x 9.1 x 5.1 in

• Total weight: 1.9 kg / 4.2 lbs

Flow Sleeve Kit for C-SJ8-X/12-X Pumps (19-001400):

Packaging dimensions: 1510 x 215 x 235 mm

59.4 x 8.4 x 9.2 in

Total weight: 11 kg / 24.3 lbs

Flow Sleeve Adaptor for C-SJ8-X/12-X Pumps (19-001450, without tube):

Packaging dimensions: 220 x 220 x 130 mm

8.6 x 8.6 x 5.1 in

• Total weight: 3 kg / 6.61 lbs

Flow Sleeve Kit for C-SJ17-X/30-X Pumps (19-001410):

Packaging dimensions: 1510 x 215 x 235 mm

59.4 x 8.4 x 9.2 in

• Total weight: 11 kg / 24.3 lbs

Flow Sleeve Adaptor for C-SJ17-X/30-X Pumps (19-001460, without tube):

Packaging dimensions: 220 x 220 x 130 mm

8.6 x 8.6 x 5.1 in

• Total weight: 3 kg / 6.61 lbs

BERNT LORENTZ GmbH

