

PS2-1800 HRE-04H

Solar Submersible Pump System for 4" wells

System Overview

Head Flow rate max. 140 m max. 0,72 m³/h

Technical Data

Controller PS2-1800

Controlling and monitoring

Integrated Sup Sancar

- · Control inputs for dry running protection, remote control etc.
- · Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracking)
- Battery operation: Integrated low voltage disconnect

 Integrated Sun Sensor 	
Power	max. 1,8 kW
Input voltage	max. 200 V
Optimum Vmp**	> 102 V
Motor current	max. 14 A
Efficiency	max. 98 %
Ambient temp.	-4050 °C
Enclosure class	IP68

Motor ECDRIVE 1800-HRE

- Maintenance-free brushless DC motor
- Water filled
- Premium materials, stainless steel: AISI 304/316

 No electronics in the motor 			
Rated power	1,7 kW		
Efficiency	max. 92 %		
Motor speed	9003.300 rpm		
Insulation class	F		
Enclosure class	IP68		
Submersion	max. 150 m		
Pump End PE HRE-04H***			

Non-return valve

- Premium materials, stainless steel: AISI 304/316
- Helical rotor pump
- Efficiency

Pump Unit PU1800 HRE-04H (Motor, Pump End)

Borehole diameter		min. 4,0 in
Water temperature		max. 50 °C

Standards



2006/42/EC, 2004/108/EC, 2006/95/EC

IEC/EN 61702:1995, IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.

max. 70 %

**Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

***Specify temperature range on order

BERNT LORENTZ GmbH

Siebenstuecken 24, 24558 Henstedt-Ulzburg, Germany, Tel +49 (0)4193 8806-700, www.lorentz.de








Created by LORENTZ COMPASS 3.1.0.223

All specifications and information are given with good intent, errors are possible and products may be subject to change without notice. Pictures may differ from actual products depending on local market requirements and regulations.




PS2-1800 HRE-04H

Solar Submersible Pump System for 4" wells

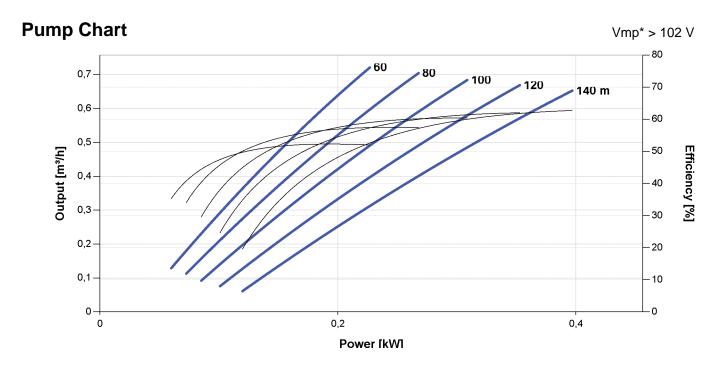

Dimensions and Weights

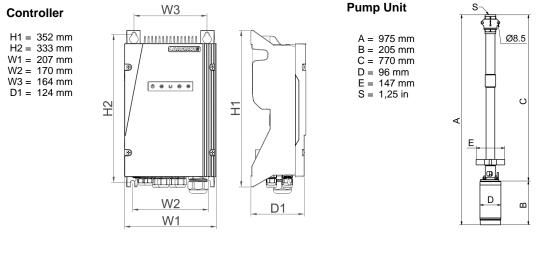

	Net weight
Controller	6,0 kg
Pump Unit	11 kg
Motor	6,7 kg
Pump End	4,0 kg

*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

BERNT LORENTZ GmbH

Siebenstuecken 24, 24558 Henstedt-Ulzburg, Germany, Tel +49 (0)4193 8806-700, www.lorentz.de

Sun. Water. Life.

Created by LORENTZ COMPASS 3.1.0.223

All specifications and information are given with good intent, errors are possible and products may be subject to change without notice. Pictures may differ from actual products depending on local market requirements and regulations.