

PS2-1800 HRE-07H

Solar Submersible Pump System for 4" wells

System Overview

 $\begin{array}{ccc} \mbox{Head} & \mbox{max. 160 m} \\ \mbox{Flow rate} & \mbox{max. 1,4 m} \mbox{/h} \end{array}$

Technical Data

Controller PS2-1800

- Controlling and monitoring
- Control inputs for dry running protection, remote control etc.
- Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracking)
- Battery operation: Integrated low voltage disconnect
- Integrated Sun Sensor

 Power
 max. 1,8 kW

 Input voltage
 max. 200 V

 Optimum Vmp**
 > 102 V

 Motor current
 max. 14 A

 Efficiency
 max. 98 %

 Ambient temp.
 -40...50 °C

 Enclosure class
 IP68

Motor ECDRIVE 1800-HRE

- · Maintenance-free brushless DC motor
- Water filled
- Premium materials, stainless steel: AISI 304/316
- No electronics in the motor

 Rated power
 1,7 kW

 Efficiency
 max. 92 %

 Motor speed
 900...3.300 rpm

 Insulation class
 F

 Enclosure class
 IP68

 Submersion
 max. 150 m

Pump End PE HRE-07H***

- Non-return valve
- Premium materials, stainless steel: AISI 304/316
- Helical rotor pump

Efficiency max. 74 %

Pump Unit PU1800 HRE-07H (Motor, Pump End)

Borehole diameter min. 4,0 in Water temperature max. 50 °C

Standards



2006/42/EC, 2004/108/EC, 2006/95/EC

IEC/EN 61702:1995, IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market requirements.

**Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature





Siebenstuecken 24, 24558 Henstedt-Ulzburg, Germany, Tel +49 (0)4193 8806-700, www.lorentz.de






^{***}Specify temperature range on order



PS2-1800 HRE-07H

Solar Submersible Pump System for 4" wells


Pump Chart

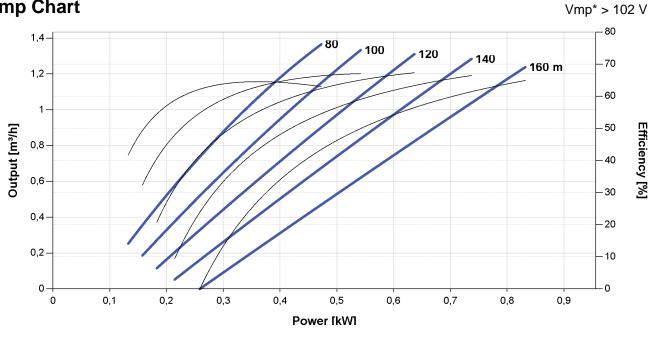

Dimensions and Weights


Controller

H1 = 352 mm H2 = 333 mm W1 = 207 mm W2 = 170 mm W3 = 164 mm D1 = 124 mm



Pump Unit

A = 970 mm B = 205 mm C = 765 mm D = 96 mm E = 147 mm S = 1,25 in



	Net weight
Controller	6,0 kg
Pump Unit	11 kg
Motor	6,7 kg
Pump End	4,3 kg

^{*}Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

BERNT LORENTZ GmbH

Siebenstuecken 24, 24558 Henstedt-Ulzburg, Germany, Tel +49 (0)4193 8806-700, www.lorentz.de



